What is the average density of gabbro in Sudbury?

What is the average resistivity of rhyolite in VMS type deposits?


The Rock Property Database System (RPDS) answers these types of questions by bringing together geological and geophysical information on a common integration platform, facilitating the interpretation of rock properties and corresponding geological description across geographic areas.

Why Is Rock Property Data Important For Exploration And Discovery?

Rock properties represent a quantitative link between geology and geophysics. Geophysical data is responsive only to physical rock properties. Through cross-correlation we can assign physical property values to geological units and use this information to characterize the rock property environment of specific ore deposits. Proper characterization of the physical property environment of ore deposits leads directly to significant exploration benefits through improved geophysical survey design, forward modelling, inversion, and interpretation. Advances in data acquisition and interpretation will yield higher quality drillhole targets.

Motivation

Decade's worth of rock property data exist throughout the industry, academic institutions, and government geological surveys. The data, for the most part, reside in reports, papers, electronic spreadsheets on the computers of individual workers, old floppy disks, etc. One of the objectives of RPDS is to provide a single repository for rock property data, as opposed to many disparate sources, thus allowing large-scale aggregation of data and in-depth analysis of rock property relationships.

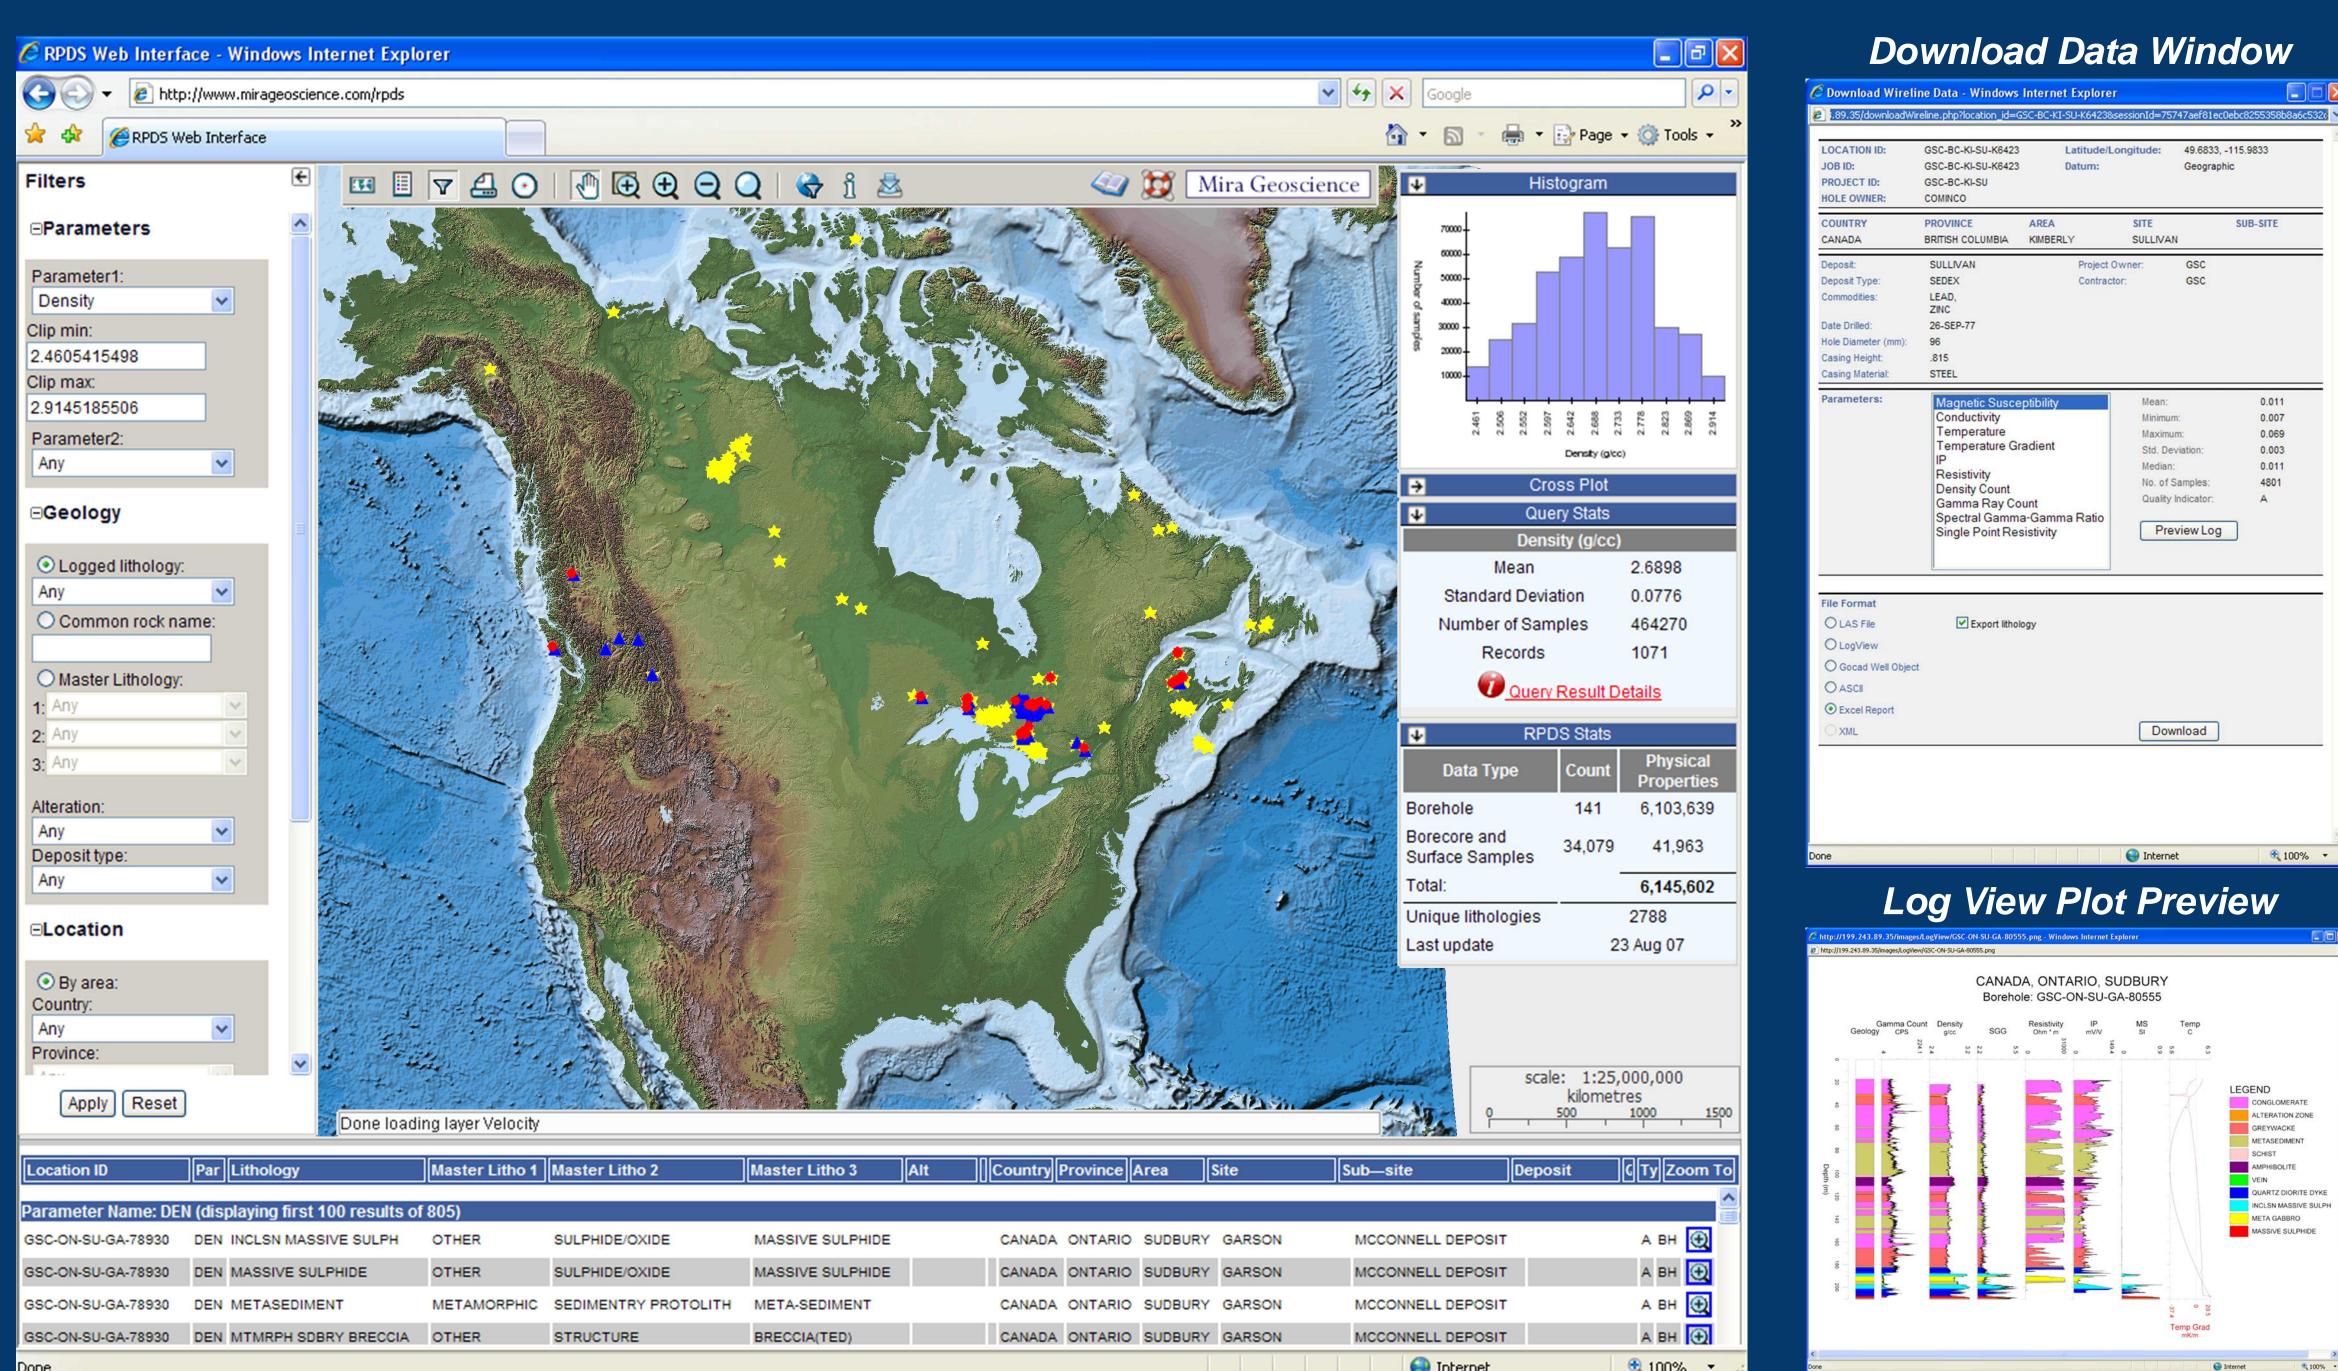

<u>RPDS Front-End: The Web Interface</u>

www.mirageoscience.com/rpds

Rock Property Database System Sharon Parsons and John McGaughey

Mira Geoscience, 310 Victoria Avenue, Suite 309, Westmount (Montreal), Quebec, H3Z 2M9

RPDS Data Model

RPDS is an Oracle-based relational data management system for borehole and surface sample rock property data. It is designed to store, manage and query physical, geochemical and geotechnical property data and metadata in correlation with geological information

The schematic diagram to the right shows the data distillation process performed in RPDS. A "geologic interval" is defined, representing a combination of the lithology, formation, and alteration information at depth along a borehole. Population statistics for that interval are calculated for all physical property parameters measured in the hole. These statistics are combined for similar "geologic intervals" across multiple boreholes and are amalgamated with sample data possessing the same combination of geologic information in similar geographic areas.

The diagram to the left shows the highly simplified data model illustrating relationships between the key database tables. The specific tables which contribute to the calculation of population statistics are described in the flowchart below.

Sample Table

Borecore Samples

Wireline Logging

Images courtesy of the GSC

The Sample Table contains physical property data and associated metadata from both borehole core samples ("borecore") originating from known boreholes and depths, and surface samples of varying origin and assumed not to originate from boreholes.

🛃 File Record I	Help	-				No. 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		_ 7
. de		Filter F	5.00 Å	}, <u>A</u> . ⊨ ◄	• • • •	- ~ × ¢	1 🐴	
Location ID :	73J2067		Sample	Name : 73J2067		Sample ID :	1	1
Sample Depth :			Latitude	m:	48.50078	Processor 1 :]
XEasting (m):	[574657	Longitud	e(*):	79.98938	Processor 2 : Optical Property Da	ata Present : □	
Y Northing (m) :	[5372236	Logger 1	: JENSEN	ILS 💌	Zip File Present :	г 🛤 🗟 📈	1
Z Elevation (m) :			Logger 2	6	•	Zip File Name :		
Comment :	nt : DISTRICT OF TIMISKAMING							
Specimen ID	Parameter	Sample	Sample Value Met		Lab		Quality	
	1 DEN	sy e.o	2.65	25 X 25 2			192.5	

Geological Table


and core photos.

The Geological Table contains al


geological information for boreholes and


information on lithology, alteration,

formation, geologic-age, assay analyses,






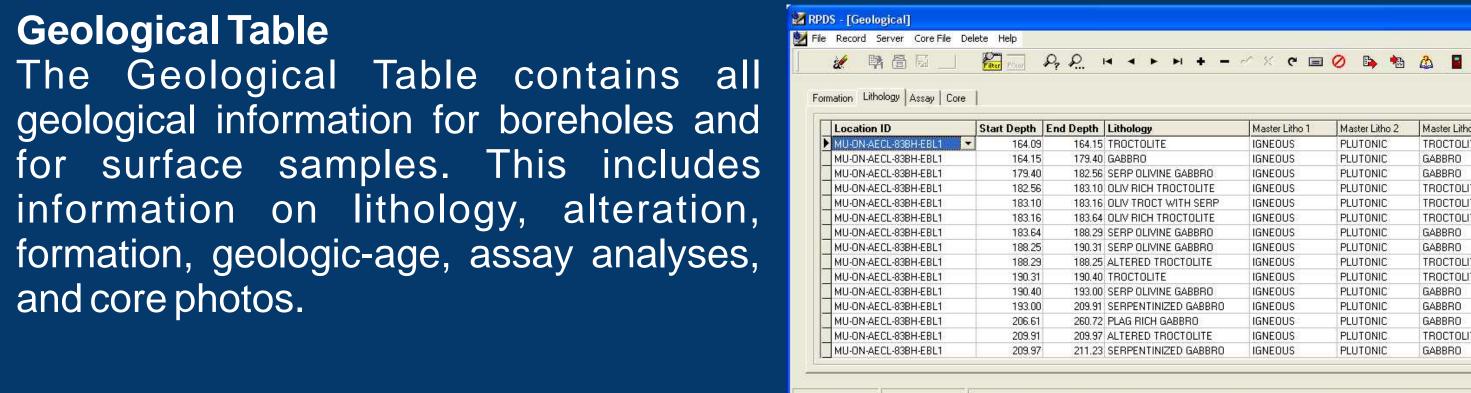


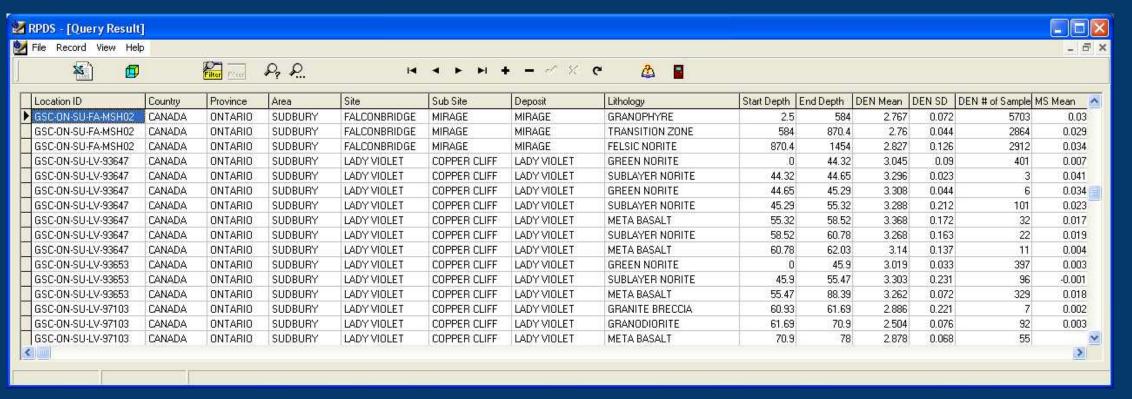

Geoproperty Table

The Geoproperty Table is a composite table where logging run data taken from the Forced Interval Table and surface sample data taken from the Sample Table are correlated with geological information and where population statistics of physical properties as a function of geological classification are pre-stored for rapid query. This table lists, for each borehole/surface sample, the mean values, standard deviations, and sample counts for physical properties per geological interval encountered in the borehole per geographic area.

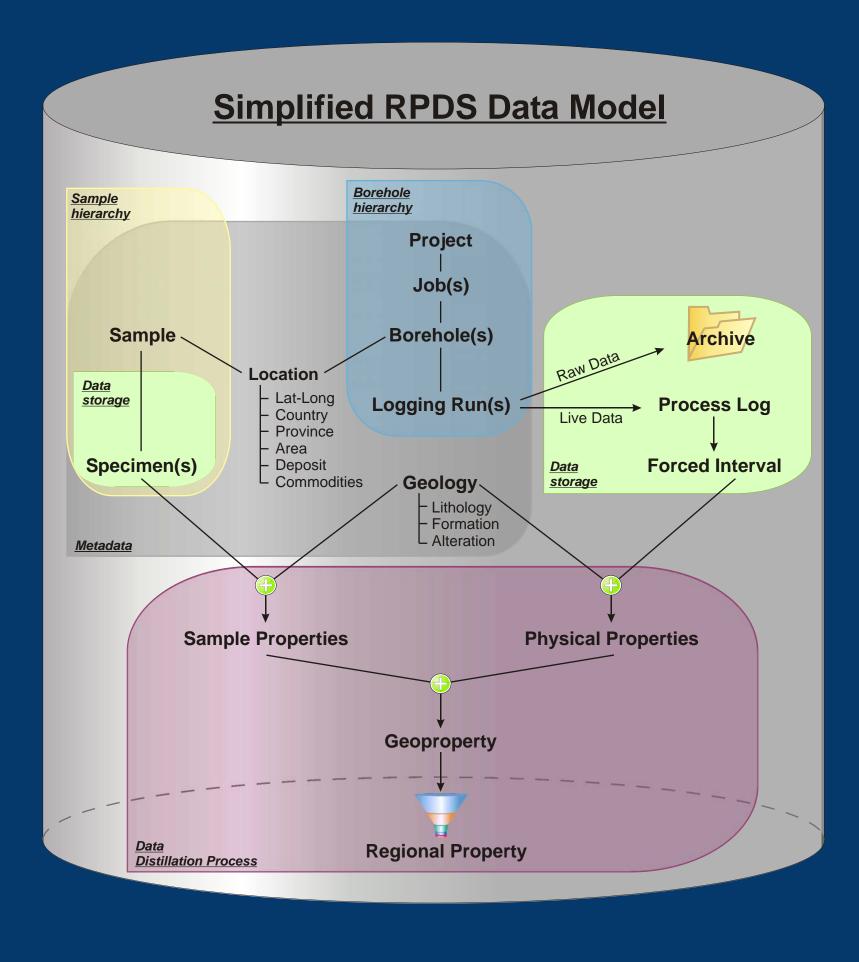

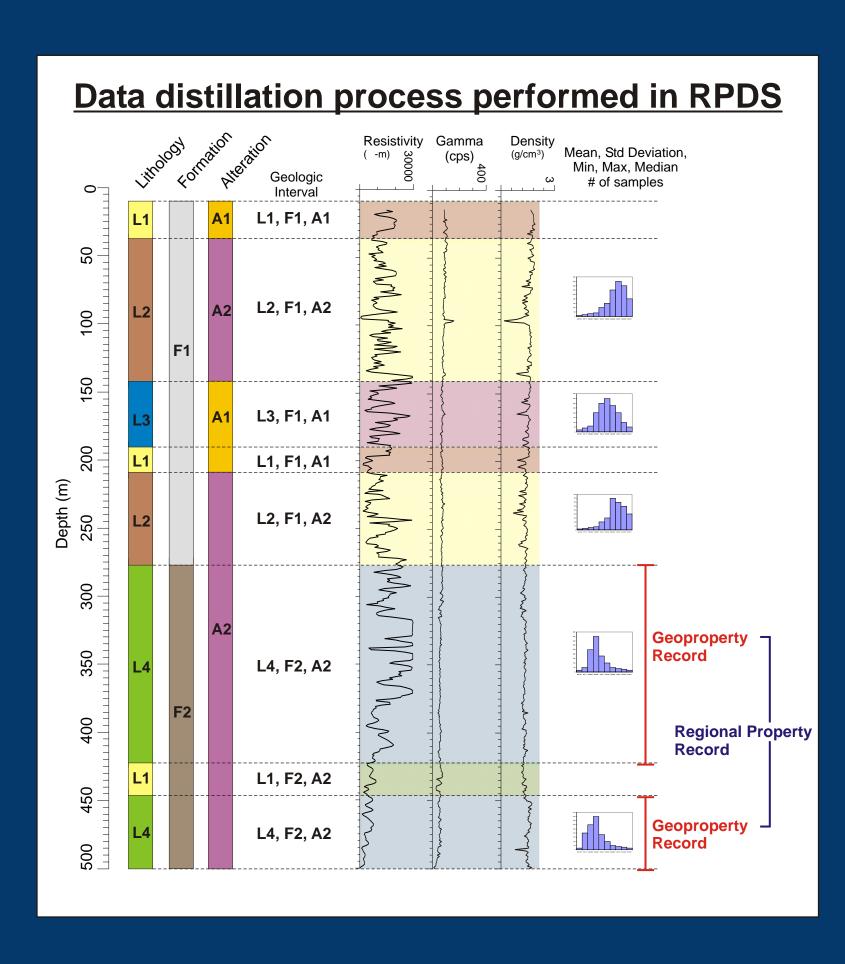


Process Log Table ile Record Server Calculate Delete Help S 🗗 🔛 🖓 S

0.31 SERP OLIVINE GABBRO

193.00 SERP OLIVINE GABBRO 209.91 SERPENTINIZED GABBRO 260.72 PLAG RICH GABBRO


209.97 ALTERED TROCTOLITE

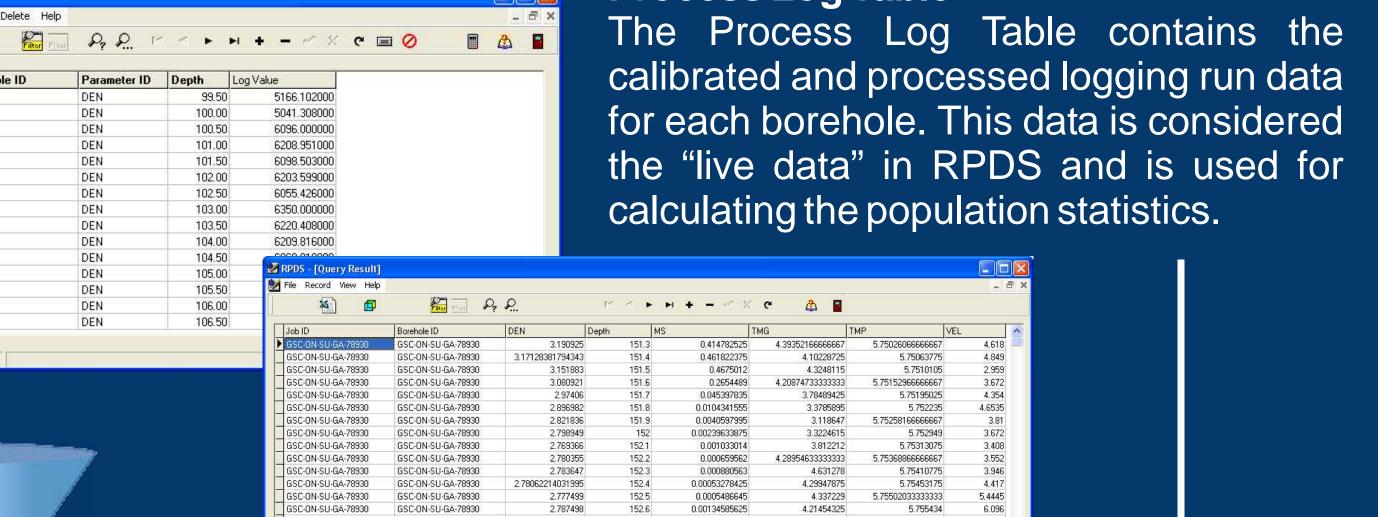

The Forced Interval Table re-calculates the Process Log data for

ERPENTINIZATION ERPENTINIZATION JNKNOWN


UNKNOWN SERPENTINIZATION



Forced Interval Table

PLUTONIC PLUTONIC PLUTONIC

TROCTOLITE GABBRO

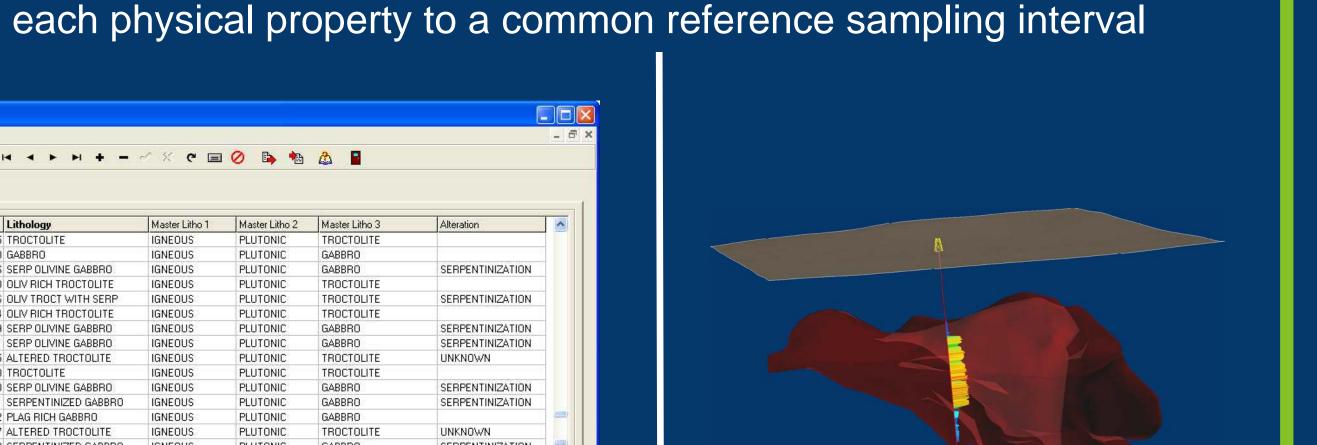


Well Objects Export


Rock Unit Betty Creek Andesite Hanging Wall Andesite Bowser Sandstone **Bowser Conglomerates** Mt Dilworth Dacite Mafic Dyke Hanging Wall Mudstone Contact Mudstone Eskay Porphyry Rhyolite Upper Betty Creek Sedim Unuk River Formation Se Dacite East Western Volcanio

Attributing the 3D geological model with magnetic susceptibility values results in the creation of the magnetic reference model. This model represents our expectation of the 3D magnetic properties of the site, based on geological mapping and physical property data. The 3D magnetic reference model provides tremendous value to an exploration program. It can be used as the basis for forward modelling studies in geophysical survey design, and enables explorationists to quantitatively assess realistic expectations from such surveys. It can also be used to constrain 3D inversions, enforcing solutions that are consistent with geological interpretation, as the example here shows. An archival compilation of rock property data will greatly facilitate our ability to routinely undertake this type of analysis. Jurisdictions that can provide such a compilation will afford a competitive advantage.

Magnetic Data

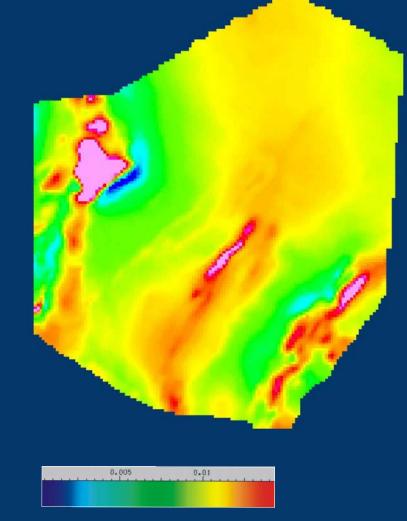


Comparing the inversion model, which is consistent with the magnetic data, to the magnetic reference model illustrates the difference between our expectation of the site based on geological mapping and the demands of the magnetic data. It explicitly shows where the earth has relatively higher or lower susceptibility with respect to our geological interpretation and physical property compilation. That is, it targets anomalies in a significantly more valid and powerful way than by analyzing the magnetic map alone.

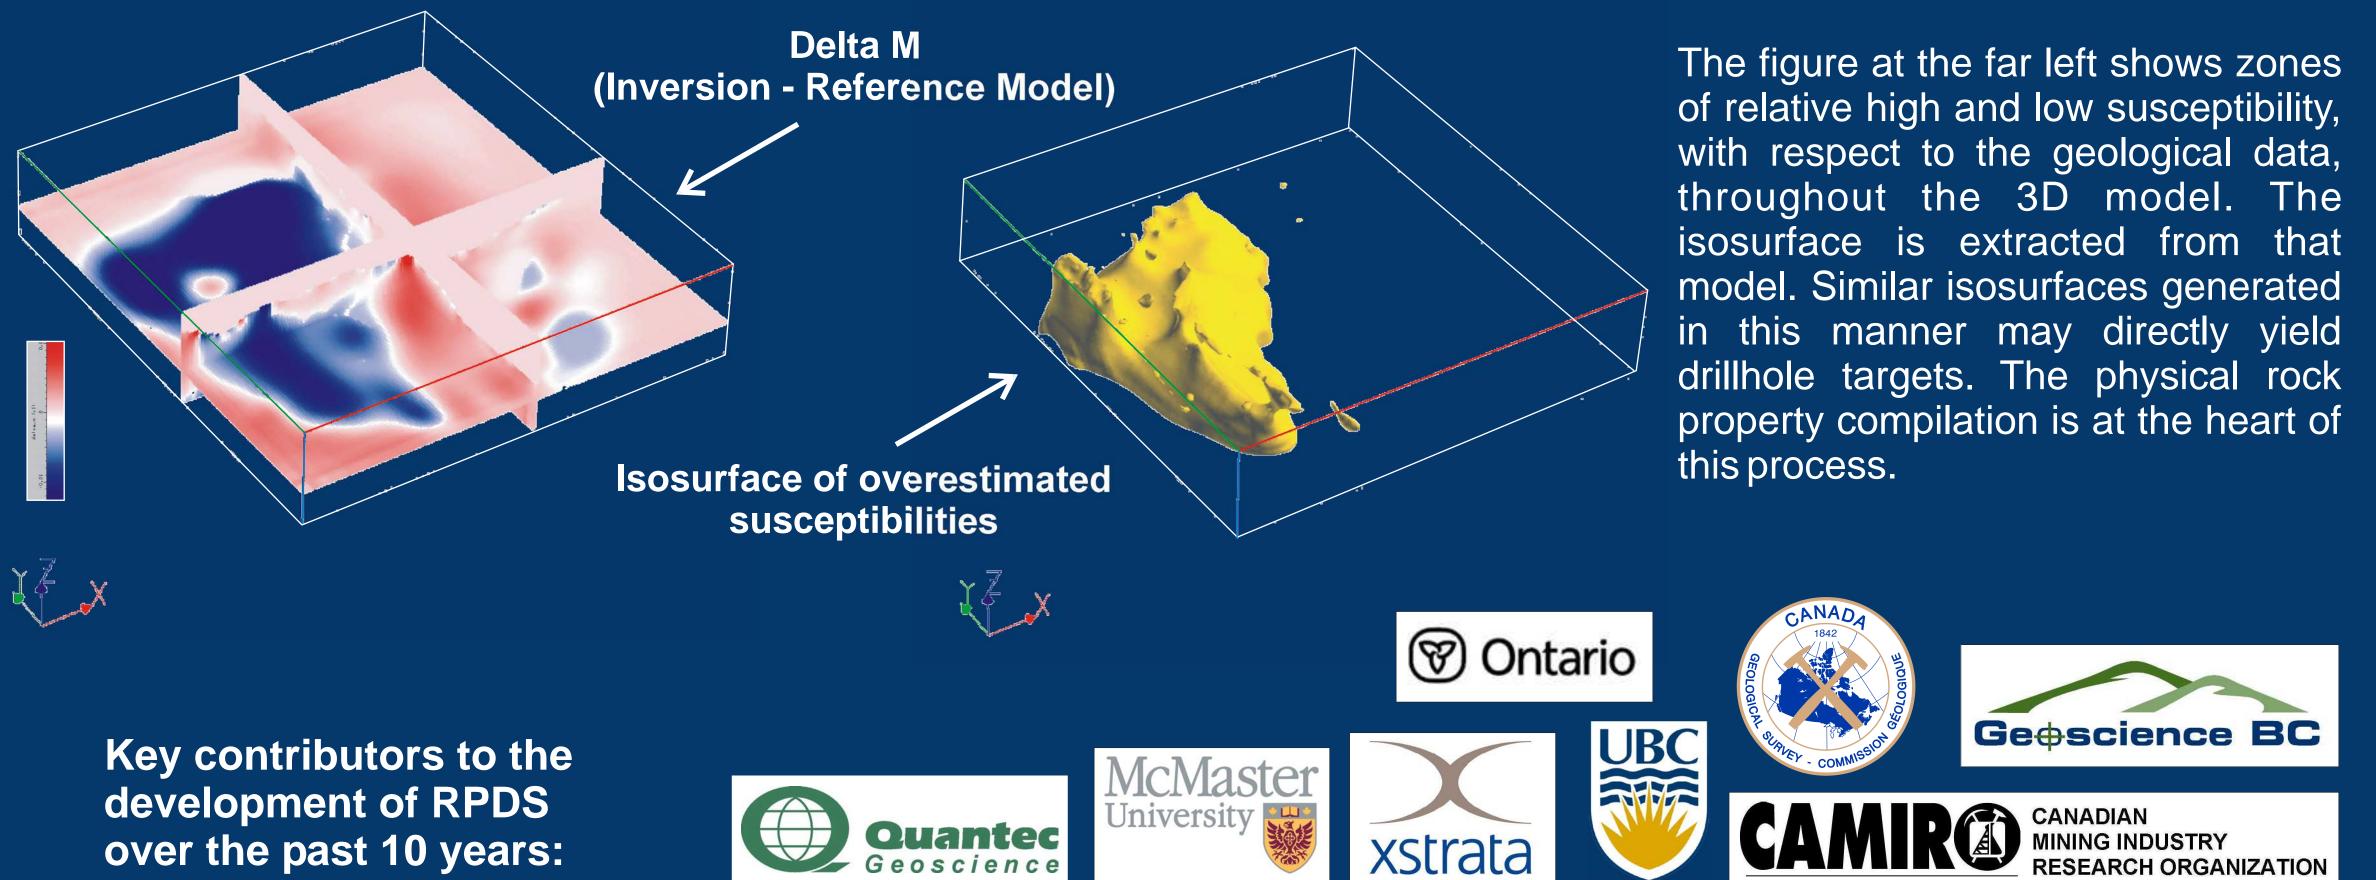

Mira Geoscience


Application: Eskay Creek, Northwest BC


	Susceptibility Values 10-3 SI units	
	3.14	
	14.193	
	0.628	
	0.691	
	3.14	
	7.285	
	2.638	
	2.638	
	3.14	
	1.256	
nents	5.526	
eds	0.628	
	3.14	
	0.377-0.44	
	14.193	

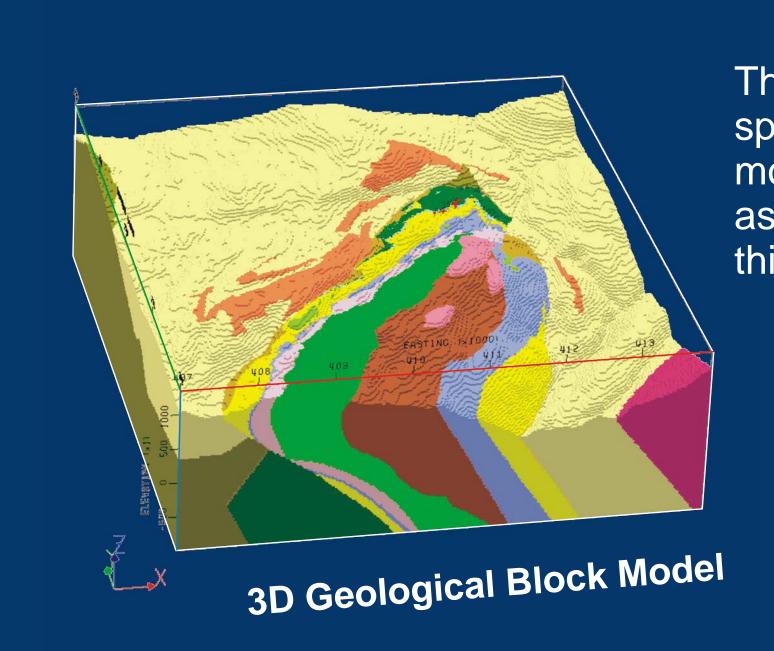

The 3D geological block model shows the spatial distribution of each rock type in the model space. Each rock type can then be assigned physical rock property values, in this case magnetic susceptibility.

Magnetic Reference Model

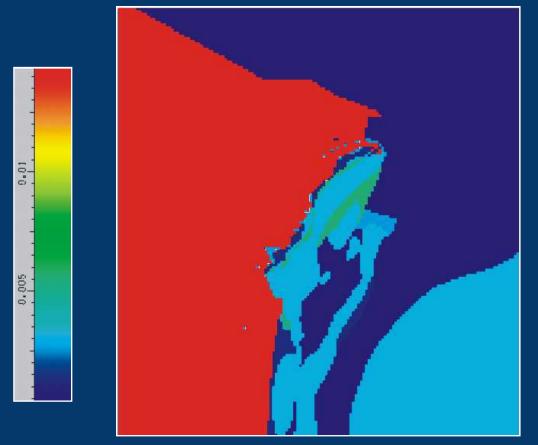

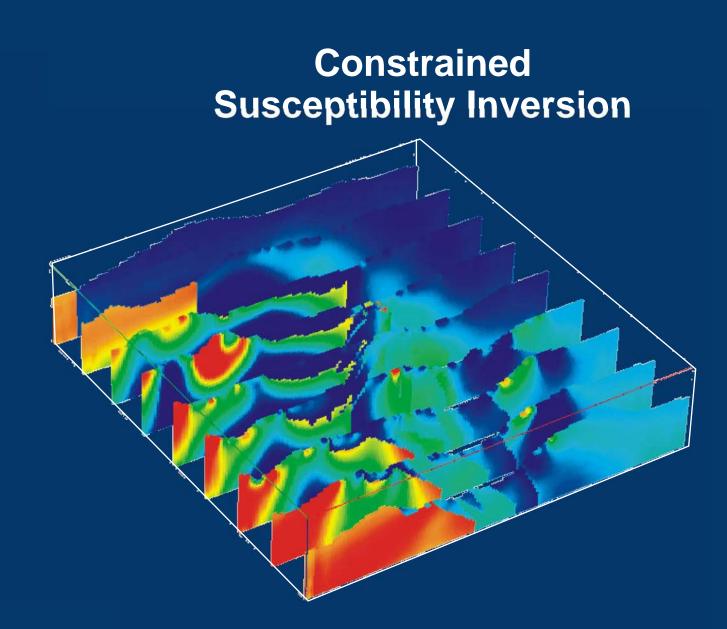

Inversion is a mathematical process that converts geophysical data, such as a magnetic map, to a spatial physical property model of the earth, such as a 3D magnetic susceptibility model. In this case, the magnetic map shown at the far left is converted to the 3D susceptibility model shown here as a series of 2D sections. The 3D susceptibility model is consistent with the magnetic map while remaining as close as possible to the magnetic reference model.

> The figure at the far left shows zones throughout the 3D model. The isosurface is extracted from that