
## Streamflow

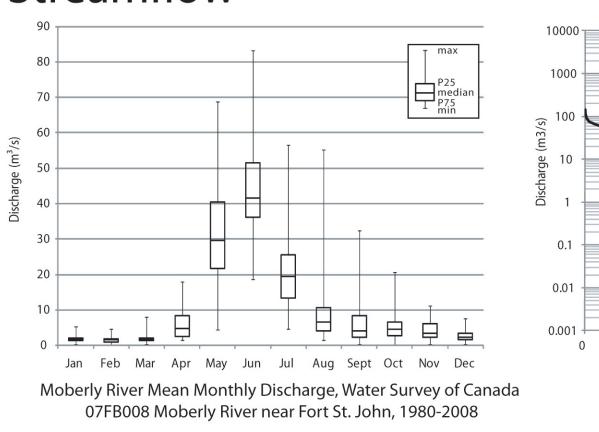


Hydrometric stations operated by the Water Survey of Canada were analyzed to identify several key parameters of flow characteristics in the study are

total annual flow volumes

inter-annual variability seasonal flow volumes

standing flow conditions in the associated watersheds such as intra-annual timing of peak flows, peri ods of low flow and magnitude of flood and drought flow events. Regression analyses were performed or total annual flows, drought flows and peak flows to relate flow characteristics to watershed size, and can near the Peace River.

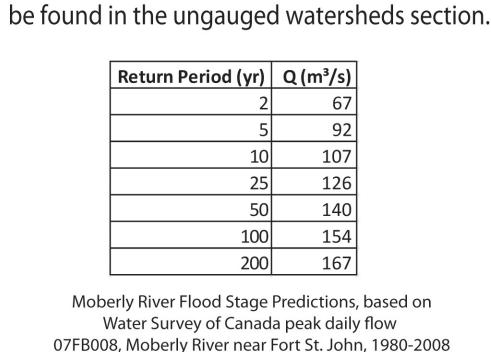


Flood predictions assuming log-Pearson Type III Distribution

Water Balance Creating a water balance for the hydrologic cycle weighs input to the system against outputs. Precipitation (rain and snowfall) are the only input to the system. Variations occur depending on when, where and at what rate precipitation occurs but for this purpose all of the water that enters the watershed leaves on an average annual basis. The three dominant processes that transport water out of the watershed are evaporation, transpiration and channel flow. Water that passes through ground water stores may take several years to exit the system. This complicates coupling water balances on a year to year basis. The relationship between ground water and surface water processes requires more in depth investigation, and in this application only considers ground water in communication with streams. Glacial

imateBC and ClimateWNA (see Future Climate section) are models which were used to produce mean annual precipitation maps for the watersheds. These maps were summed to calculate total volume of water input. Gauged streamflow records provide one output calcula tions, leaving evaporation, transpiration and loss to groundwater (ET/GW) unknown. The Consultative Group for International Agricultural Research esti-

mate actual evapotranspiration to be in

the range of 40 - 50 cm per year.

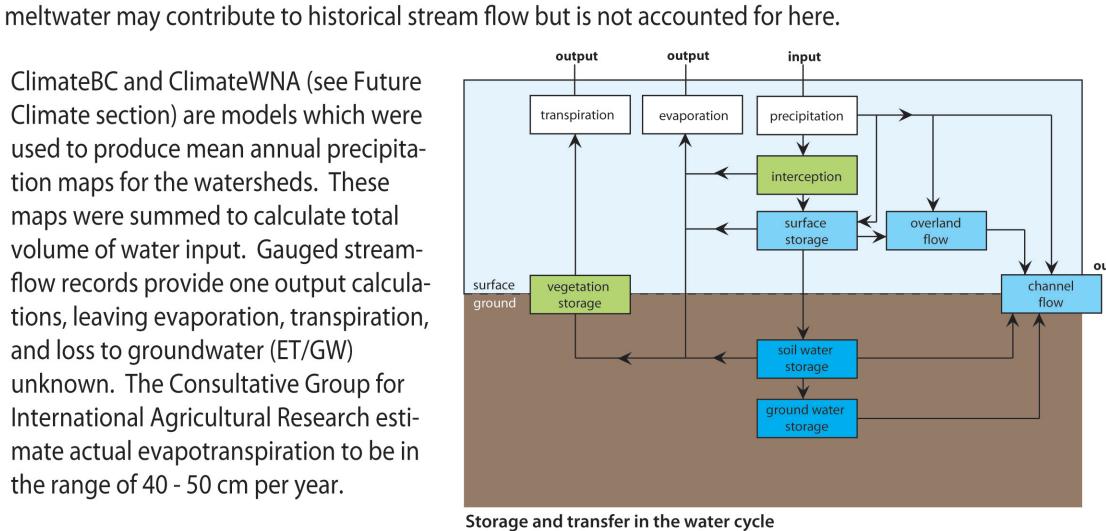

The water balance calculated for the Moberly River watershed is based on the upstream drainage area from the Environment Canada station located halfway between Moberly Lake and the Peace River. Calculations indicate a runoff ratio of 39% for precipitation on an annual basis. Values for runoff and ET/GW fit with those calculated for other watersheds in the region. Much of the watershed is forested and moderately sloped.

The majority of precipitation that falls as rain, outside of summer storm events, is likely evaporated or transpired by vegetation. Significant runoff is generated by melting of winter snow accumulation in the late spring. In lower elevations in the watershed, lower runoff percentages are likely as winter snow accumulation decreases.

Watershed Station Area (km²) Precip (cm/yr) Runoff (cm/yr) ET/GW (cm/yr) % runoff Precip 2010-2039 (cm/yr) Moberly 07fb008 1540.8 62.5 24.4 38.1 39.0

Average annual water balance for gauged watershed in the Moberly River watershed Precipitation is based on PRISM data for period 1961-1990. Runoff is based on WSC data: 07fd001 - 1980-2008.

# Moberly River Flow Duration Curve, Water Survey of Canada 07FB008 Moberly River near Fort St. John, 1980-2008 The only hydrometric station in the Moberly River watershed (07FB008) is midway between Moberly Lake and the Peace River. Moberly Lake acts as a

buffer to large peak flows and limits the magnitude

of food events in comparison with other major river

systems in the region. Similar to peak flow events,

drought flows are buffered by Moberly Lake. The

60-90th percentile flows.

flow duration curve exhibits a very low slope over the

Median peak flows occur in June and are driven by

volume in the Moberly River is relatively consistent

with a decadal oscillation in peak volumes. Flow re-

from Rocky Mountains to Foothills and finally plains

Moberly River Total Annual Discharge, Water Survey of Canada

07FB008, Moberly River near Fort St. John, 1980-2008


snow melt through the late spring. Total annual flow


gest lakes in northeast B.C., and the largest lake in the Montney Water Project area. Nearly 500 lakes are mapped in this watershed. Close to 400 of these are smaller than 1 ha, many of which are abandoned oxbows or other channel segments pstream of Moberly Lake and open water features in wetlands downstream near the Peace River. A number of larger lakes are found in the lower portion of the watershed, including Boucher (124 ha), Rene (64 ha), and several unnamed lakes. The Cameron Lakes are 60 and 70 ha in size and are located just north of Moberly Lake.

At nearly 3000 ha, Moberly Lake is one of the big-

Bathymetric maps are available for 4 lakes within the Moberly River watershed (Boucher, North and South Cameron, and Moberly Lakes). These bathymetric maps have been collected by the BC Ministry of Environment and provide information on maximum and average depths, perimeter, area and volume. All bathymetric maps for the Montney Water Project area are available in the database for this project.

Hydrologic monitoring stations within the Peace region are in most cases ocated on major drainages. This leaves many watersheds without gauged

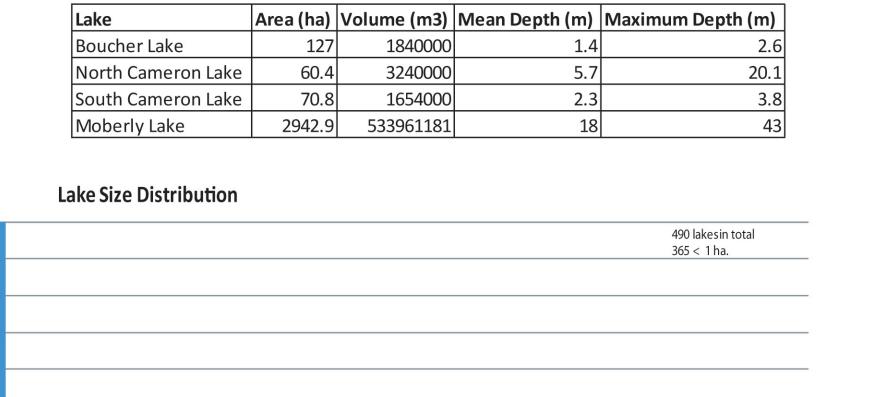


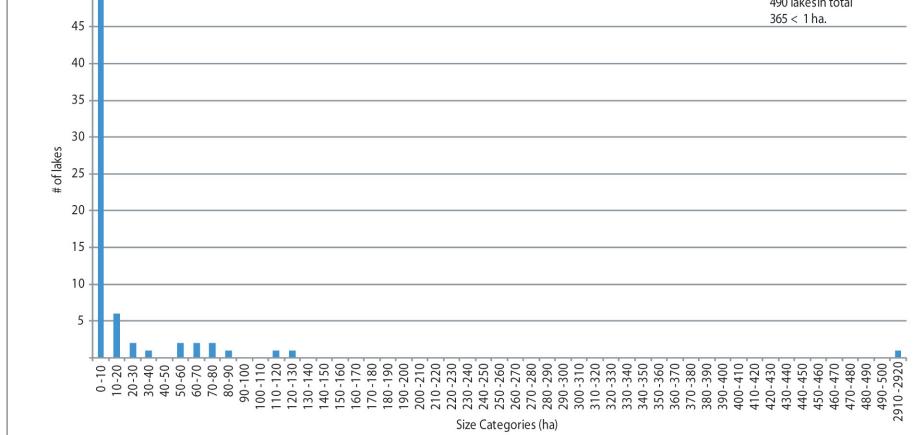


Surface area of lakes within assessment watersheds

**Moberly River watershed** 

cients for estimating the same parameters in ungauged watersheds, using upstream drainage area. frequency analysis using a log-Pearson Type III distribution was onducted to determine the peak daily discharge for 17 stations in the study area. Regression analysis suggests that both the 2 and 10 year peak daily discharges are strongly correlated to watershed size. These values can thus be roughly estimated using the equation: Q is discharge in m<sup>3</sup>/s Tr is the return period C and b are coefficients A is the watershed size in square kilometres.

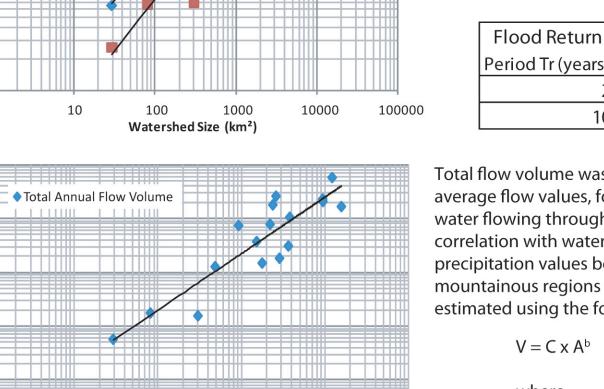

otal flow volume was calculated on a median annual basis using monthly average flow values, for stations with whole year records. Total volume of water flowing through drainages in the study area has a moderate to strong correlation with watershed size. Variation exists due to large differences in orecipitation values between some of the watersheds moving from more estimated using the following equation:  $V = C \times A^b$ 

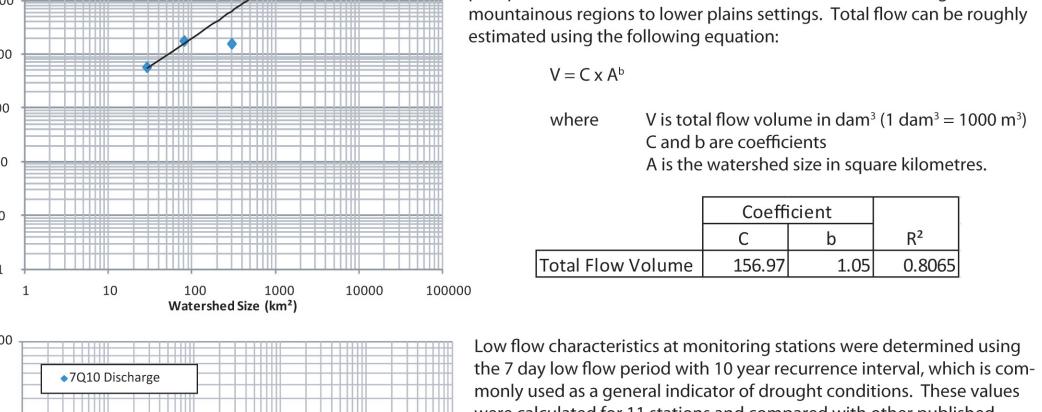

the 7 day low flow period with 10 year recurrence interval, which is comwere calculated for 11 stations and compared with other published values for these stations where available. No relationship was found (R<sup>2</sup>=0.2) when correlating 7Q10 values with watershed size for all of the stations. Moderate to strong correlation was found when all stations other than those in the Kiskatinaw and Pouce Coupe River watersheds were considered\*. This correlation used only larger watersheds as inputs as smaller drainages are seasonaly intermittent. Drought discharge can be estimated in larger (>500 km<sup>2</sup>) watersheds in the foothills region by the following equation:

A is the watershed size in square kilometres

Methodology after British Columbia Streamflow Inventory, BC Ministry of Environment, 1998.

where 7Q10 is the seven day low flow (m<sup>3</sup>/s) with a return period of 10 years

Moberly River watershed surficial materials

Much of the Moberly River watershed is glacial till, with lower elevations in the watershed composed of fine grained glaciolacustrine materials. The map to the left is coarse scale, national mapping at 1:5,000,000 scale. As part of the Montney Water Project more detailed mapping is being compiled into digital format. N.T.S. Map Sheets 94A and 93P will be available at 1:250,000 and 94A/SE and 93P/NE will be available at 1:50,000. Surficial material type is an important component for hydrological modelling and can provide other operational benefits such as construction aggregate resource identification.

Surficial Materials of Canada, GSC Map 1880A

Vegetation Resources Inventory, BC Ministry of Forests and Range


The B.C. Ministry of Forests Vegetation Resources Inventory provides detailed stand level mapping including tree species, age and height estimates. Coverage of the Montney Water Project area is not complete. GeoBC provides Baseline Thematic Mapping, which reflects current conditions as of the date of imagery of the product (1992) which is out of date for time sensitive or transitional areas (e.g. burned, logged, etc). A third data set useful in characterizing vegetation characteristics is the Biogeoclimatic Ecosystem Classification (BEC) Program which classifies the province into zones based on forest type, moisture and temperature.

Surficial Materials and Land Use

Upstream in the Moberly River watershed, most of the land is coniferous forest. Patches of shrubs/herbs/bryoids are the result of extensive logging activities in the watershed. Downstream of Moberly Lake the majority of the watershed is forested by aspen and poplar stands and substantial tracts of land are used for agriculture or range.

The headwaters of the Moberly River originate in the Rocky Mountains and flow eastward through the foothills into Moberly Lake. Moberly Lake, the watershed's largest, is drained by the continua tion of the Moberly River which flows northeast through the Peace plateau where it empties into the Peace River, just south of Fort St. John. The watershed comprises an area of 1,850 km<sup>2</sup>, the ma-

The Saulteau and West Moberly Lake First Nations each have communities on the eastern and western shores of Moberly Lake. Economic activity in the area has been primarily in the forest sector, agriculture sector, retail trade, coal mining and natural gas exploration. Agriculture and tourism are both important as are trapping, hunting and fishing activities. Coal resources are concentrated in the headwaters while gas exploration and development activities are focused in the

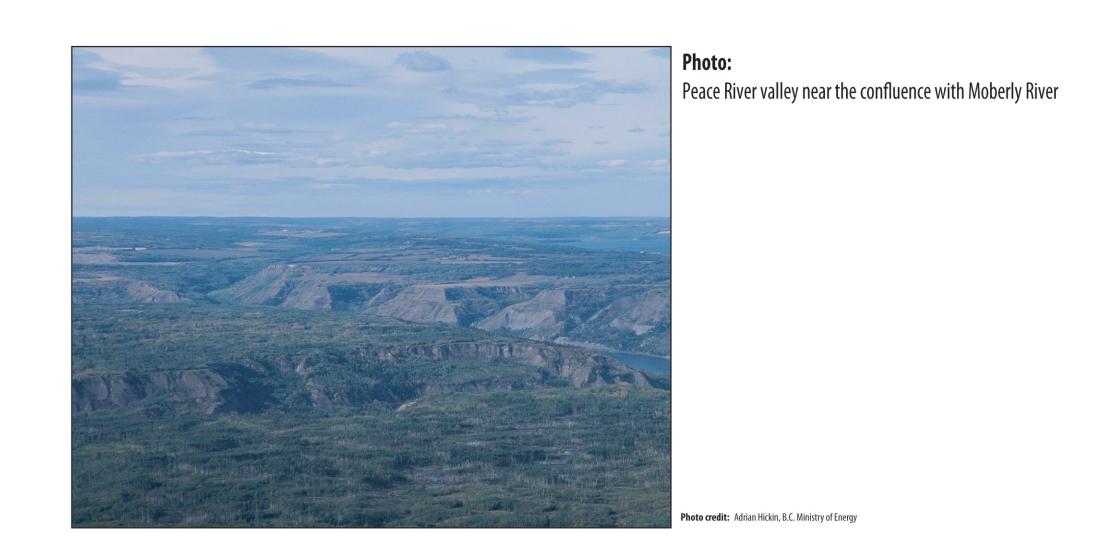

### Peace Region

jority of which is forested.

northeastern portion of the watershed.

The Peace River originates in the mountains of British Columbia and forms the southwestern branch of the Mackenzie River System. From its headstreams in the Rocky Mountains the Peace River flows northeast into Alberta and eventually empties into the Slave River, which enters the Arctic Ocean through the Mackenzie basin. The Peace River's total course from the head of the Finlay is 1,923 km, and it covers a total area of 302,500 km<sup>2</sup>. The B.C. portion of the Peace River basin covers an area of 41,600 km<sup>2</sup>.

The largest tributaries of the Peace River basin in B.C. are the Pine, Halfway, Beatton, Moberly, and Kiskatinaw Rivers. The Peace River is influenced by BC Hydro's WAC Bennett and Peace Canyon Dams in the upper reaches of its drainage. These hydro-electric dams produce 31% of British Columbia's hydro-electric power.

The basin includes the major communities of Fort St. John, Dawson Creek, Chetwynd Mackenzie, Tumbler Ridge, and Hudson's Hope. Much of the basin is forested with significant natural gas exploration and production in the Montney shale gas play, a northwest to southeast trending geologic zone underlying the river basin from Pink Mountain to the BC border at Dawson Creek. Agricultural production occurs near the communities of Fort St. John and Dawson Creek. Natural gas, mining, agriculture, forestry, and tourism are the basis of the local and regional economies with mining and natural gas development being the biggest employers in the region.

### **Ground Water and Paleovalleys**


07FC003 WSC Hydrometric Station

<sup>4A24</sup> BC Snow Survey Station

OGC Oil / Gas Field

Data Sources: GeoBC, BC Ministry of Energy, Oil & Gas Commiss Projection: BC Albers, NAD 83

Montney Trend

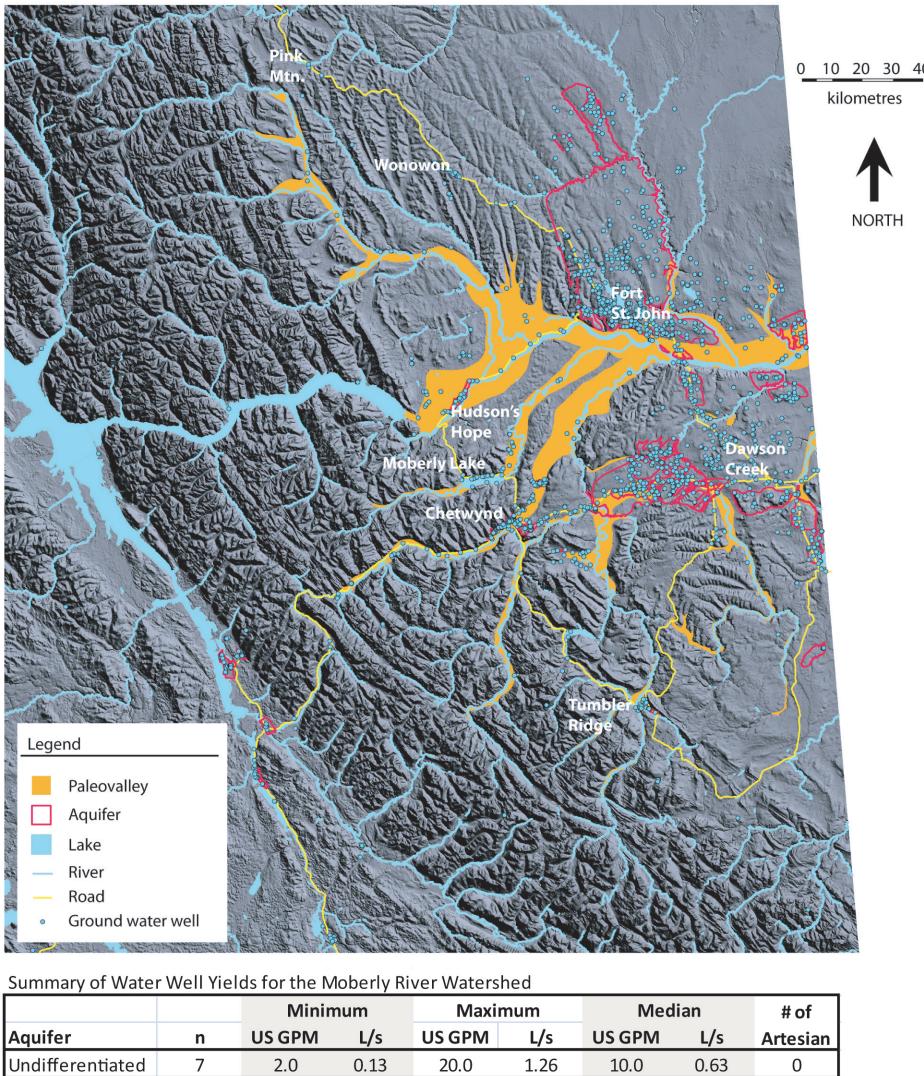

7 0.1 0.01 18.0 1.14 5.0 0.32

8 5.0 0.32 25.0 1.58 8.0 0.50 0

The majority of the Peace Region is covered by glacial and interglacial sediments deposited during repeated glaciations in the Quaternary Period. These sediments o 10 20 30 40 vary significantly in thickness. In some locations, bedkilometres rock is covered by a thin veneer of sediment or is exposed at surface. In others places, such as in pre-glacial buried paleovalleys, these sediments can be over 10 m thick. In many cases modern rivers occupy pre-glacial river valleys and the thick unconsolidated valley-fill sediments may host aquifers with significant volume of water. Areas with thick Quaternary sediments are targets for further aquifer evaluation.


> The BC Ministry of Environment maintains a database of water wells drilled in the province and delineates ground water aquifers based on this database and other geologic and hydrogeological information.

> As part of the Montney Water Project, geologic analysis is being performed by the B.C. Ministry of Energy to more accurately map the thicknesses of Quaternary sediments that may have potential for hosting water. The B.C. Ministry of Environment is collecting additional water well information, which is being used to update the online water well database and refine mapping of aguifers in unconsolidated sediments and bedrock.

This map illustrates the geographic distribution of water wells, currently mapped and classified aquifers and areas that likely have thick Quaternary sediment which will be evaluated for their aquifer potential.

Ground water Aquifers, B.C. Ministry of Environment aleovalleys, B.C. Ministry of Energy unpublished Ground water wells, B.C. Ministry of Environment

### Moberly River Watershed Overview

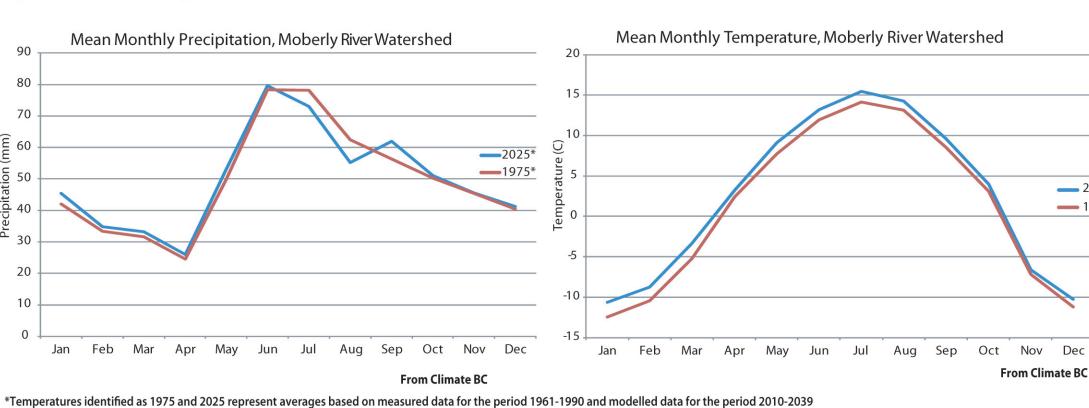

At Pine Pass, an automated snow pillow collects information on snow accumulations. Peak accumulation regularly occurs in April. Snow water equivalent (swe) is a standardized method of communicating the water volume in snow pack considering depth and density.


There are 14 other snow monitoring locations within or very near the Montney Water Project area, the majority of which are high in the mountains in the headwaters of the watersheds. The station at Pine Pass resentative of snow accumulations

Environment Canada, and the BC Ministries of Transportation and Forests operate weather stations throughout the Peace region. Climate data from these stations is available in the database for the project

# Climate

The Moberly River watershed is narrow and heads due west into the mountains from Moberly Lake. This part of the watershed receives the majority of the precipitation, occurring at the greatest rate during the early summer. Some significant winter accumulation occurs in the westernmost portion of the watershed.

is the nearest to the headwaters of the Moberly River but station 4A22 at Sukunka River may be more rep-

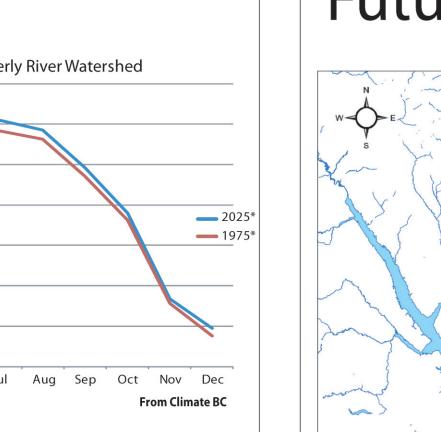

# Future Climate Model (2025)

ClimateBC is a modelling program developed by researchers at the University of British Columbia in collaboration with the BC Ministry of Forests, in order to provide high resolution climate data for resource management in Western Canada. Recent updates have expanded the scope of the project to Western North America in ClimateWNA. These products are based on PRISM Climate Data developed by Oregon State University, with improved elevation related variations, additional modelled parameters, and the introduction of forward looking climate predictions based on a variety of global circulation models. T period of normals (1961-1990) has been compared with predicted values for the period 2010-2039 using the CGCM2-A2x global circulation model. Mean annual temperatures as well as mean annual precipitation is expected to increase across the Peace region. Temperature is expected to increase in a relative way, consistent across the region, while the magnitude of precipitation will vary.

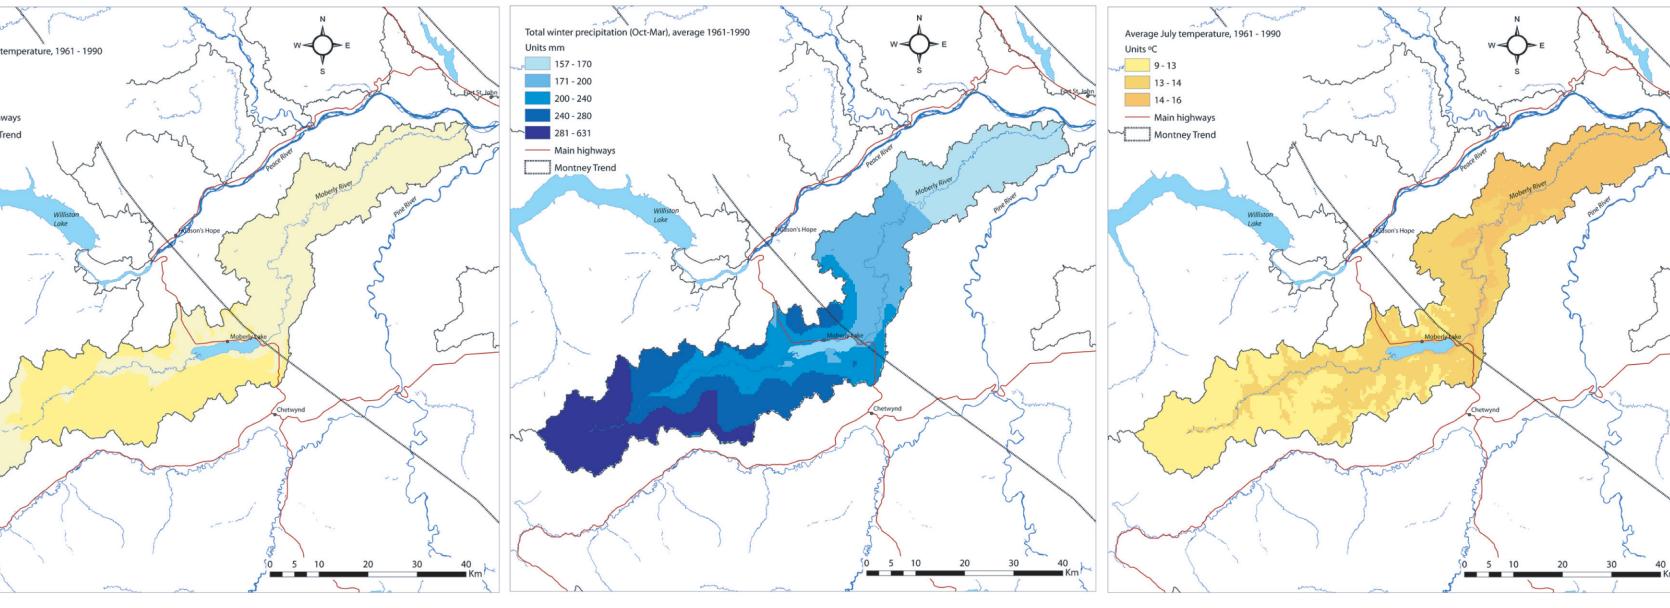




Diagram of Hydrologic C.

discussion, and references.

For the surface water component of the Montney Water Project, several parts of

the water cycle have been assessed and described. Themes include flow charac-

teristics in gauged watersheds, lake size distributions, climate and projected

future climate, groundwater, vegetation and surficial geology characteristics,

water balances and discussion of estimating conditions in ungauged watersheds.

Posters have been created highlighting key aspects of these themes, in each of the

accompanying the poster series, and includes additional analyses, more thorough

major watersheds in the region. Supporting information is available in a report

# Winter (Oct-Mar) precipitation

### **July Mean Temperature**

### groups all want to ensure that water sources are carefully managed during natural gas development. These stakeholders require detailed, scientifically-based and unbiased information about existing water resources to make appropriate policies, regulations and permit decisions as well as to support public discussion on issues related to water use. In response to this need, Geoscience BC met with industry and government in early 2010 and began a collaboration to undertake water studies in the Montney area. The Project is

he Montney Shale Gas Play in northeast British Columbia is a world-class unconventional natural gas resource development. Operations in the Montney are moving into developme

drilling, which will increase the demand for water and deep sites for the disposal of fluids. Provincial, First Nations and local governments, industry, communities, and environmental

designed to create a comprehensive database of surface water, ground water and deep saline aquifers in the Montney area.

Phase I of the study focuses on collecting, analyzing and interpreting available water information in the Montney region. required, a second phase of the study will focus research on addressing remaining data gaps. Three components of the project are as follows:

Surface Water: Collection and presentation of data on surface water system (lakes, streams and wetlands) and processes that control availability of water (timing and amount). Analysis of these components provides insight into important aspects of the regional water cycle, including seasonal flow conditions, climate, vegetation and land use

Unconsolidated and shallow bedrock: Unconsolidated and shallow bedrock aguifers host a significant source of water in the Peace Region. These aguifers are best developed in areas with thick Quaternary age sediments often associated with buried paleovalleys. This component of the MWP has focused on compiling a database of available surface and subsurface data that elucidates the thickness of the unconsolidated drift and the bedrock topography. These data will be used to model and map major drift thickness trends and bedrock topography which represent high potential target areas for water in unconsolidated aquifers.

Deep bedrock: Define and characterize candidate aquifers (water sources) and potential deep disposal zones, providing a general description and indicating the homogeneity of each aquifer. The work focuses in zones deeper than domestic water wells and in zones typically explored by the oil and gas sector, greater than 250 m below surface. Compilation of existing hydro-stratigraphic data and development of groundwater flow models for select areas will assist in the identification of regional aquifers with suitable reservoir characteristics, fluid content, and capacity to be viable source/disposal candidates.

### Montney Water Project Partners:

440 - 890 W. Pender St.



Geoscience BC is an industry-led, industry-focused not-for-profit society. Its man-

date includes the collection, interpretation and marketing of geoscience data

Government and works in partnership with industry, academia, government,

First Nations and communities to attract mineral and oil & gas investment to B

info@geosciencebc.com

www.geosciencebc.com



















and expertise to promote investment in resource exploration and development in British Columbia. Geoscience BC is funded through grants from the Provincial Derek Brown, Janet Fontaine - Strategic West Energy Ltd Adrian Hickin - B.C. Ministry of Energy

- Foundry Spatial Ltd.





**Summer (April-Sept) precipitation**